

Garden Gate Closer GTS 120/170

Mounting example type 5

Wall mounting with one-sided or centrally located door hinges



I. Check material and tool list

Your garden gate closer is delivered already assembled. Your product also includes two aluminium brackets with different side lengths, 4 tapping screws and 2 cap nuts.

WARNING: The garden gate closer is **preloaded!** The preloading safety should **not be removed before insertion!** Due to preloading the threaded rods of the gate closer are skewed. They will adjust during assembly.

- 1 garden gate closer GTS 120/170
- 1 aluminium bracket (bracket 1): 60, 80 or 100 mm
- 1 aluminium bracket (bracket 2): 30 mm
- 2 cap nuts M6
- 4 tapping screws 4,8 x 19 mm




You will need a **cordless screwdriver** with a **4.2 mm metal drill** and a **cross slot (Phillips) screwdriver** (PH2) for installation. Furthermore, you need a **spirit level**, **measuring tape**, **pen** and two **no.10 fork wrenches** as well as an **impact drill**, and **suitable dowels and screws** for your type of masonry.

II. Determine type of mounting

The following mounting example shows **mounting type 5**, that is the **mounting on the wall with one-sided or centrally installed door hinges**. Normally we use bracket 1 size 60 mm for this type of installation. For different situations, you may eventually need a longer (80 or 100 mm) bracket.

All sorts of mounting brackets and different types of mounting instructions are available on our website:
<https://gardengatecloser.com>

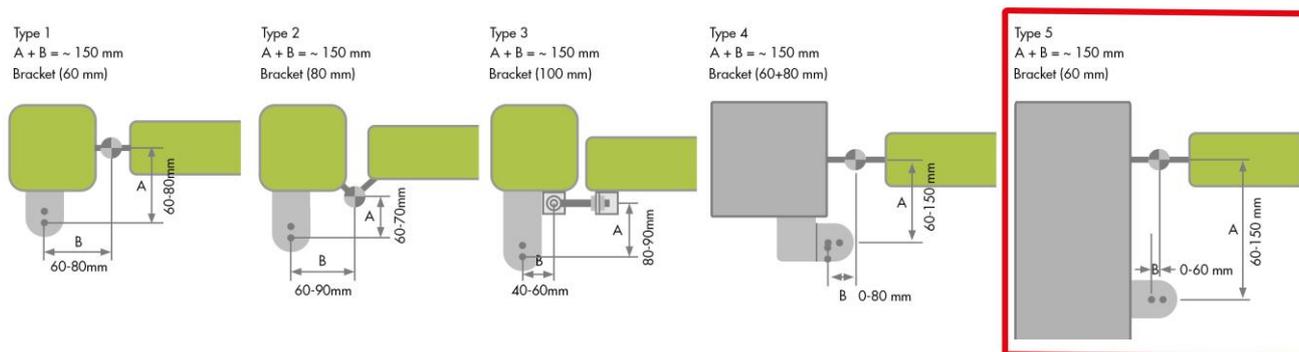

Using the following **QR-Code**, you can also watch this and all other mounting types on Youtube video
https://youtu.be/Or68F_dQ2sc (german video with english subtitles):



Assembly Type 5



All other mounting videos

III. 6 steps for successful mounting

1. Determine mounting position of gate closer
2. Measure bracket 1 (on the wall)
3. Check piston stroke
4. Mount bracket 1
5. Position and mount bracket 2 (on the gate)
6. Insert and tighten garden gate closer


Step 1: Determine mounting position of garden gate closer

First, you need to determine the position of the garden gate closer. It can be positioned at the top of the gate, in the middle or at the bottom. It is important that it is **mounted levelled!** As well, the two brackets (bracket 1 and bracket 2) need to find sufficient hold on the wall and on the gate respectively. The larger bracket (**bracket 1**) is to be mounted **on the wall**. The smaller bracket (**bracket 2**) will be mounted **on the gate!**




Step 2: Measure bracket 1 wall-sided

After having positioned the gate closer correctly, check the distance of the gate's pivot point (located in the middle of the hinges) and the pivot point of the closer (chosen mounting hole of bracket 1). For measuring use the larger bracket (**bracket 1**).

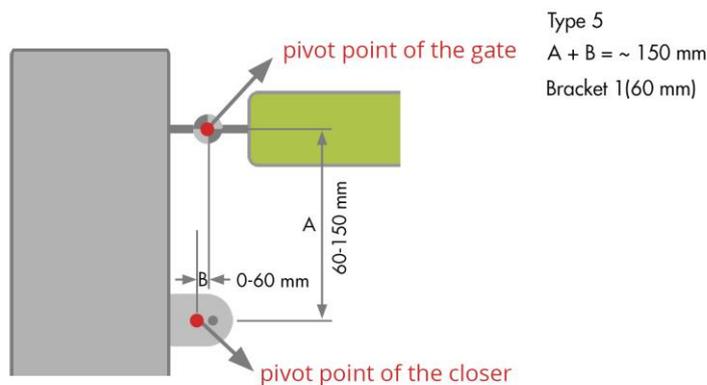

The **sum of the two distances A and B** in this mounting type should **not exceed 150 mm**, and also should **not be less than 140 mm** either. However, if the sum of the distances is bigger than 150 mm, the gate can only be opened a little **less than 90°** at worst.

In this case, distance B is about 10 mm. That means the distance from the centre of the hinges to, in this case, the outer mounting hole of bracket 1. Now, move the bracket laterally alongside the wall until **distance A is 140 mm**. Just as done when measuring distance A, distance B is also defined by measuring from the centre of the hinges to the position of the mounting hole on the bracket.

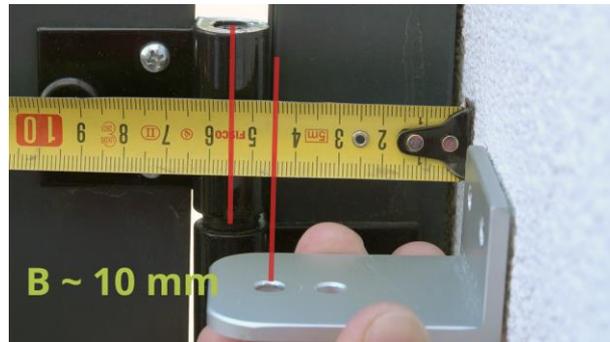

Note: In step 3 the exact positioning of the bracket will be checked again and possibly fine-tuned.

Step 3: Check piston stroke

This step is to check the measured position of bracket 1 and possibly change it slightly, so that the optimized closing performance can be guaranteed. If you choose to proceed with the measurements done before you can skip this step. **However, we strongly advise you to take your time for this verification.**

To verify the mounting positions fix bracket 1 provisionally **at the position as measured before** and install the gate closer in the mounting hole as chosen before. **Close the gate** and mark the position of the bolt on the frame of the gate (mark 1). Then **open the gate** and mark again the position of the bolt on the frame (mark 2).



If the **distance between the two marks** amounts to **about 155 mm**, the position of the bracket is **optimal**. If the distance is a bit less, increase distance B a bit. If the distance is bigger than 155 mm, decrease distance B or choose another mounting hole.



Note: The gate closer can be installed in any mounting hole of the bracket, as long as the distance is correct. If you use a larger bracket than 60 mm (**80 or 100 mm**) we advise you to choose one of the **centred mounting holes** so you can possibly fine-tune the gate closer later.

Step 4: Mount bracket 1

Mark and drill the respective holes on the wall, using the appropriate tools for your type of wall. In our picture example we use an impact drill with a **6 mm concrete drill**.

Note: Make sure to use the respective dowels and screws for your type of masonry!



After installing the dowels, fix bracket 1 with the screws. Make sure that the screws are about 10 mm longer than the dowels used.



Attention: Make sure that the bracket lies flat upon the wall. In the case of brick or stone walls, level the ground before mounting!

Step 5: Position and mount bracket 2 on the gate

Having positioned and fixed the first bracket (bracket 1) correctly, you've already done the biggest part of the mounting! Now, the second bracket (**bracket 2**) must be positioned correctly on the gate. Therefore, the distance between the two mounting holes (that is the chosen mounting hole on bracket 1 and the mounting hole on bracket 2) must be between **540 mm** and **545 mm**. **Exact measurement is essential here!**

But be careful: If this distance is too small, the gate will only open a little less than 90°. If it is too big, the gate won't close entirely.



Having measured the distance correctly, **check the vertical position of the closer using the spirit level**. It is important that the brackets are placed levelled as well.



Having marked the drilling holes correctly, centre-punch and drill the holes using a **4.2 mm metal drill**. The **size of the drill** is essential here! If the diameter of the hole is too small, the screw can tear off. In case that the diameter is too big, the screw won't find sufficient hold. After drilling the holes, fix bracket 2 using the enclosed screws.

Attention: If you adjust the position of bracket 1 later, bracket 2 must be re-positioned as well to ensure the correct hole-to-hole distance.

Step 6: Insert and tighten garden gate

For easier mounting, the garden gate closer is pre-loaded when delivered. For inserting the gate closer, open the gate until the gate closer can be put into the respective holes without applying any force. The **thicker end** of the closer is to be put into **bracket 1** (near the wall). The **slimmer end** is being inserted into **bracket 2** (on the gate).



Finally, the gate closer is fixed using the cap nuts. Therefore screw on and tighten the cap nuts using the locknuts. In this step the nuts have to be tightened in such a fashion, so that the **threaded rods** are straightened and stand in **right angles** to the mounting brackets.



Note: In most cases, the pre-loading security bolt loosens by itself during this procedure. In case that the bolt remains, carefully move the gate just a few millimetres towards its opening direction!



You've done it. We hope you enjoy your new Garden Gate Closer!

If you have any further questions about the assembly, do not hesitate to contact us via email office@gardengatecloser.com or via our **WhatsApp service +43 664 881 89 781!**

Also have a look at our installation videos on our homepage! The most frequent questions can be answered immediately.

Your gardengatecloser.com team

PS: If you are satisfied with our gate closer your **positive review** on our website or on Amazon would make us very happy!